




SOSPENSIONE
SUSPENSION



Pag. 238

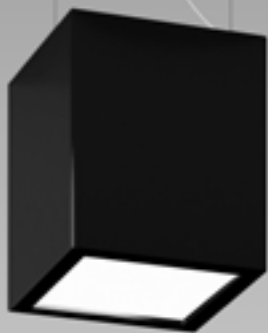

LED
INSIDE

TESEO

design Luce Lab

Sospensione a LED per interni, dal design minimale caratterizzato da sezione tubolare quadrata 84x84 mm, in metallo verniciato bianco. Su richiesta per forniture contract sono realizzabili finiture speciali. Predisposta con sistema di bilanciamento per cavetti d'acciaio a regolazione automatica.

L'apparecchio è disponibile in quattro versioni:

- con modulo LED, alimentatore incluso, 230Vca e vetrino diffusore (flusso luminoso 800 lm) o ottica ad apertura fascio 27° (flusso luminoso 700 lm)

- con modulo LED, alimentatore escluso, 500mA e vetrino diffusore (flusso luminoso 1100 lm) o 700mA con ottica ad apertura fascio 27° (flusso luminoso 700 lm)

Disponibile in due temperature colore 3000K e 4000K.



Suspension for indoors, minimalist design with 84x84 mm square section tube, in white metal painted. On request for contract supplies, special finishings can be customized. Arranged with a balancing system for automatic steel wires regulation. Available in four versions:

- with LED module, driver included, 220Vac and frosted glass (800 lm luminous flux) or 27° lens (700 lm luminous flux)

- with LED module, driver not included, 500mA and frosted glass (1100 lm luminous flux) or 700mA 27° lens (700 lm luminous flux)

Available in two different colour temperatures: 3000K and 4000K

TESEO

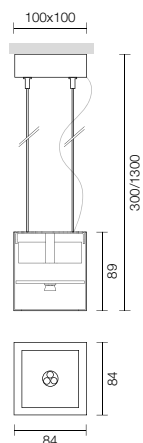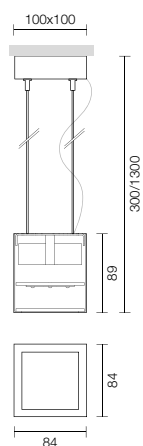

LED module 6 CREE XT-E 9W 230Vac

IP40 Classe 1 **A+**

Alimentatore 350mA incluso / 350mA Power supply included

| CODE | FINISHINGS | LIGHT BEAM | COLOUR TEMPERATURE |
|----------------|---------------|------------------------|-----------------------|
| T004 LB | 01 XX* | A Frosted Glass | K3 3000K 650lm |
| T004 LB | 01 XX* | A Frosted Glass | K4 4000K 800lm |

LED module 6 CREE XT-E 9W 500mA

IP40 **A+**

Alimentatore non incluso / Power supply not included

| CODE | FINISHINGS | LIGHT BEAM | COLOUR TEMPERATURE |
|----------------|---------------|------------------------|------------------------|
| T004 LA | 01 XX* | A Frosted Glass | K3 3000K 900lm |
| T004 LA | 01 XX* | A Frosted Glass | K4 4000K 1100lm |

LED module 3 CREE XT-E 9W 230Vac

IP20 Classe 1 **A+**

Alimentatore 700mA incluso / 700mA Power supply included

| CODE | FINISHINGS | LIGHT BEAM | COLOUR TEMPERATURE |
|----------------|---------------|-------------------|-----------------------|
| T004 LB | 01 XX* | M Lens 27° | K3 3000K 600lm |
| T004 LB | 01 XX* | M Lens 27° | K4 4000K 700lm |

LED module 3 CREE XT-E 8W 700mA




IP20 **A+**

Alimentatore non incluso / Power supply not included


| CODE | FINISHINGS | LIGHT BEAM | COLOUR TEMPERATURE |
|----------------|---------------|-------------------|-----------------------|
| T004 LA | 01 XX* | M Lens 27° | K3 3000K 600lm |
| T004 LA | 01 XX* | M Lens 27° | K4 4000K 700lm |

PHOTOMETRICS

ACCESSORIES



TE079 Driver 500mA 12W
TE049 Driver 500mA 25W
pag. 338



TE052 Driver 700mA 8W
TE072 Driver 700mA 20W
pag. 338

* Finiture su richiesta / On request finishings