



LED
INSIDE

INCASSI CON BORDI
RECESSED LIGHT WITH EDGES

STRIPE SYSTEM WITH EDGES LED

design Luce Lab

Sistema ad incasso con bordi costituito da un profilo in alluminio al metro elettrificato con una o due strip led (19,2 W/m, 1520 lm/m), passo 2,5cm, e un diffusore in PMMA satinato.

Lo starting kit, il diffusore, la lunghezza del profilo e il numero di moduli e/o accessori vanno specificati nell'ordine.

Disponibile in alluminio anodizzato nei colori alluminio naturale satinato, titanio spazzolato e cromo brillantato e nelle verniciature bianco lucido e nero opaco. Disponibile con 3 temperature colore del bianco: K3, K4, K6 (caldo 3200K, neutro 4300K, freddo 6000K).

Recessed system with edges made up of an aluminium profile per meter electrified with one or two IP20 LED strips with high luminous flux 1520 lm/m (19,2 W/m), 2,5 cm pitch, and a PMMA diffuser.

The starting kit, the diffuser, the length of the profile and the number of elements and/or accessories must be specified in the order.

Available in the following anodized aluminium colours natural satin aluminium, shiny chrome and brushed titanium and in the following painted versions: shiny white and matt black.


Available in three white colour temperatures K3, K4, K6 (warm 3200K, neutral 4300K, cold 6000K).



Velocità
d'installazione
Quick
assembling


STRIPE WITH EDGES LED

MODULO AL METRO
ELEMENT PER METER

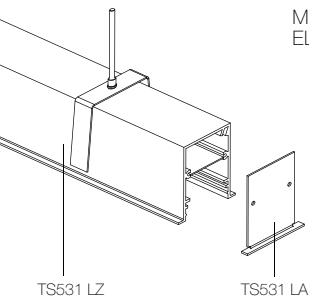

TS531 LZ

TS531 LA

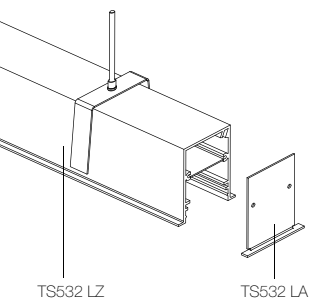

TS532 LZ

TS532 LA



FORO / HOLE:
Ltot (mm) x 47

Ltot (mm) = Σ moduli/elements (300 ÷ 3000) + 6 mm

1 STRIP LED HI-POWER P.2,5 cm 19,2W/m 24Vdc

IP43 IP40 ∇ \diamond **A+** **CE**

Alimentatore non incluso / Power supply not included


CODE	FINISHINGS	COLOUR TEMPERATURE	LUMINOUS FLUX
TS531 LZ	03 07 31 32 33	K3 3200K	1504lm/m
TS531 LZ	03 07 31 32 33	K4 4300K	1520lm/m
TS531 LZ	03 07 31 32 33	K6 6000K	1600lm/m
TS531 LA	03 07 31 32 33	STARTING KIT 1 STRIP HI POWER	

2 STRIP LED HI-POWER P.2,5 cm 19,2W/m 24Vdc


IP43 IP40 ∇ \diamond **A+** **CE**

Alimentatore non incluso / Power supply not included


CODE	FINISHINGS	COLOUR TEMPERATURE	LUMINOUS FLUX
TS532 LZ	03 07 31 32 33	K3 3200K	3008lm/m
TS532 LZ	03 07 31 32 33	K4 4300K	3040lm/m
TS532 LZ	03 07 31 32 33	K6 6000K	3200lm/m
TS532 LA	03 07 31 32 33	STARTING KIT 2 STRIP HI POWER	

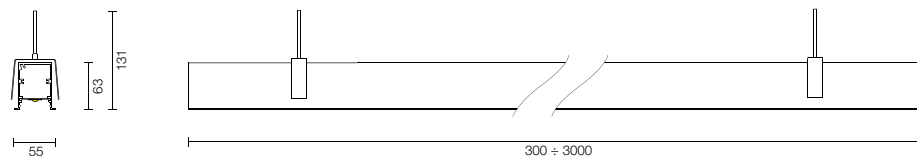

PHOTOMETRICS




COMPONENTS



Diffusore
Diffuser


TS506 XX

al metro / per meter



Staffa di giunzione
Metal junction bar

TS508



Alimentatore
Power Supply
pag. 108



Kit dimmerabile
Dimmable kit
pag. 108